



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

REC'D 12 OCT 2004

WIPO

PCT

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

03445098.1

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Best Available Copy

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



Anmeldung Nr:  
Application no.: 03445098.1  
Demande no:

Anmeldetag:  
Date of filing: 05.09.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Borealis Technology Oy  
P.O.Box 330  
06101 Porvoo  
FINLANDE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Crosslinkable high pressure polyethylene composition, a process for the  
preparation thereof, a pipe and a cable prepared thereof

In Anspruch genomene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

C08L83/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

CROSSLINKABLE HIGH PRESSURE POLYETHYLENE COMPOSITION, A  
PROCESS FOR THE PREPARATION THEREOF, A PIPE AND A CABLE  
PREPARED THEREOF

Field of the invention

The present invention relates to a crosslinkable high pressure polyethylene composition containing ethylene silane copolymer resin having a content of  
5 silane of about 0.1 to 10 weight% and at least one silanol condensation catalyst. The invention further relates to a process for the preparation thereof, to a pipe made of said composition and to the use of the composition as an insulation for a cable.

10

Background of the invention

Presently commercially available ethylene-vinyltrimethoxysilane copolymer resins having a vinyltrimethoxysilane (VTMS) content in the range of about 1.0-2.0  
15 weight% and a density below 925 kg/m<sup>3</sup> are not suitable for pipe applications within the segment of plumbing and heating. Such water crosslinkable polyolefin pipes (PEX-b) do not have the properties required to pass the quality control point of hydrostatic pressure resistance at  
20 95°C in accordance with i. e. the German medium density norm for PEX pipes, DIN 16894. The lifetime of a pipe according to this norm should be at least 1000 hour at 95°C, the circumferential stress in the pipe wall being 2.8 MPa. At a temperature as high as 95°C the hydrostatic  
25 pressure resistance of the commercially available pipe above is very weak and such a pipe has a lifetime of less than 1 hour, i. e. the time to failure is less than 1 hour.

Attempts have been made in order to improve the  
30 hydrostatic pressure resistance of pipes made of ethylene-vinyltrimethoxysilane copolymer resins by increasing

the density of the copolymer resin by mixing the resin with a high density polyethylene polymer (HDPE). However, incorporating about 30 weight% high density polyethylene polymer into the resin and thereby increasing the density thereof to 934 kg/m<sup>3</sup> does not result in an increased lifetime. Accordingly such pipes will not pass the quality control of DIN 16894.

Ethylene-vinylsilane copolymers, such as e. g. Visico™, may also be used for moisture crosslinking within the field of cable insulations. However, the prior art silane crosslinked polyethylene insulation materials have exhibited problems with so called "frozen layers", i. e. the molecules of the co-polymer will not have the time to relax when they hit the cold conductor and this will in turn lead to a thin layer of highly oriented molecules being formed close to the conductor. Such orientation of the molecules leads to deterioration of the mechanical properties. Previously, this problem has been solved by preheating the conductor or by decreasing the shear stresses by using a tube on die in stead of a pressure die. However, the investment in a preheater induces higher costs. Furthermore, a reduction of the die pressure by using a tube on die leads to a deterioration of the wetting properties, and this in turn involves reduced adhesion properties between the conductor and the insulation material.

#### Summary of the invention

The object of the present invention is to provide crosslinkable high pressure ethylene silane copolymer resins, wherein the above mentioned problems and drawbacks have been eliminated or at least alleviated.

For this purpose an ethylene silane copolymer resin is provided which has the benefits of being suitable for pipe applications within the segment of gas pipes, plumbing and heating as well as for applications within the segment of cable insulations.

This object has been achieved by a crosslinkable high pressure polyethylene composition containing ethylene silane copolymer resin having a content of silane of about 0.1 to 10 weight% and at least one  
5 silanol condensation catalyst, characterised in that the density of the composition is  $>925 \text{ kg/m}^3$ .

Preferred embodiments of the polyethylene composition are defined in dependent claims 2-10.

According to a preferred embodiment the density of  
10 the composition is  $>928 \text{ kg/m}^3$ , preferably  $>933 \text{ kg/m}^3$ .

According to another preferred embodiment the ethylene silane copolymer resin is an ethylene-vinyltriethoxysilane copolymer, an ethylene-gamma-methacryloxy-triethoxysilane copolymer, an ethylene-vinyltrimethoxysilane copolymer or an ethylene-gamma-trimethoxysilane  
15 copolymer resin, preferably an ethylene-vinyltrimethoxysilane copolymer resin.

According to another preferred embodiment the ethylene-vinyltrimethoxysilane copolymer resin further comprises high density polyethylene in an amount of  $<40$   
20 weight%.

According to yet another preferred embodiment the amount of high density polyethylene is 15-35 weight%, preferably 20-30 weight%.

Further, according to a preferred embodiment the  
25 MFR<sub>2</sub> at  $190^\circ\text{C}/2.16 \text{ kg}$  is 0.1-100 g/10 min, more preferably 0.5-6 g/10 min and most preferably 1-4 g/10 min.


In another preferred embodiment of the invention the elongation at break is  $>200\%$  as measured according to ISO  
30 527 and the tensile strength at break is  $>12.5 \text{ MPa}$  as measured according to ISO 527.

The gel content is preferably  $>65 \text{ weight\%}$  as measured according to ASTM D 2765 and preferably the polyethylene composition further comprises 0.1-2.0 weight% of a  
35 drying agent.

Another object of the present invention is to provide a method for the preparation a crosslinkable polymer composition according to any of claims 1-10.

5 This object has been achieved by a process for the preparation a crosslinkable polymer composition according to any of claims 1-10, characterised in that the process is a high pressure process at a pressure above 1200 bar.

According to a preferred embodiment the polymer composition is crosslinked in the presence of a silanol condensation catalyst comprising a compound of formula (I):



or a precursor thereof, Ar being a hydrocarbyl substituted aromatic group comprising at least 14 carbon atoms.

15 In another embodiment of the invention the polymer composition is crosslinked in the presence of a silanol condensation catalyst preferably dibutyl-tin-dilaurate.

Another object of the present invention relates to a pipe made of a crosslinkable polymer composition according to any of claims 1-10.

In a preferred embodiment of the invention the pressure resistance at 95°C is at least 2.8 MPa, more preferably 3.6 MPa and most preferably 4.4 MPa for a failure time of at least more than 1000 hours.


25 Finally, the composition of the invention may advantageously also be used as an insulation for an cable.

By the invention a polymer composition is provided which has the properties required to pass the quality control point of hydrostatic pressure resistance at 95°C in accordance with i. e. the German high density norm for PEX pipes, DIN 16892. The lifetime of a pipe according to this norm should be at least 1000 hours at 95°C, the circumferential stress in the pipe wall being 4.4 MPa.

35 Accordingly, by the composition of the invention higher pressure resistance is also achieved. Furthermore a high pressure reactor may be used for the production of the composition of the invention.

### Detailed description of preferred embodiments

According to one embodiment of the invention the crosslinking process is carried out in the presence of a silanol condensation catalyst comprising a compound of formula (I):

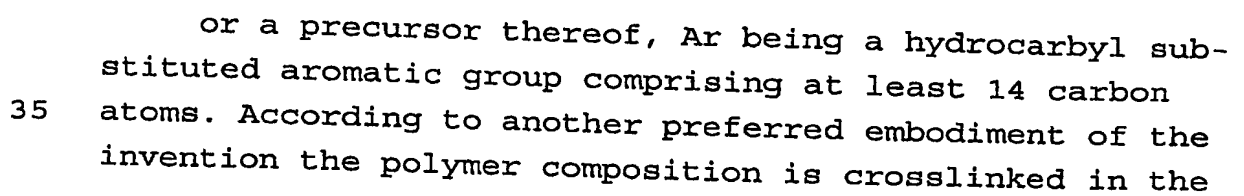

presence of a silanol condensation catalyst, preferably dibutyl-tin-dilaurate.

By additionally admixing of <40 weight%, more preferably 15-35 weight% and most preferably 20-30 weight% of  
 5 a high density grafted silane PEX material to the two component blend allow to pass the quality control point at 95°C, the circumferential stress in the pipe wall being 4.4 MPa as stated in the German high density norm for PEX pipes, DIN 16892.

10 The present invention will now be illustrated by way of non-limiting examples of preferred embodiments in order to further facilitate the understanding of the invention.

## 15 Examples

### Example 1

Tests were performed on pipes produced from different polymer compositions and the results are shown below in table 1.

20 The following polymers were used in the examples:

Polymer A: High pressure produced ethylene-vinyl trimethoxysilane copolymer having a density of 930.5 kg/m<sup>3</sup>, MFR<sub>2.16</sub>=1.9 g/10 min and a VTMS content of 1.9 weight%. Produced in a tubular reactor at 2550 bar and  
 25 250°C.

Polymer B: High pressure produced ethylene-vinyl trimethoxysilane copolymer having a density of 925 kg/m<sup>3</sup>, MFR<sub>2.16</sub>=0.9 g/10 min and a VTMS content of 1.25 weight%. Produced in a tubular reactor at 2400 bar and 280°C.

30 Polymer C: High pressure produced ethylene-vinyl-trimethoxysilane copolymer having a density of 922 kg/m<sup>3</sup>, MFR<sub>2.16</sub>=0.9 g/10 min and a VTMS content of 1.25 weight%. Produced in a tubular reactor at 2300 bar and 310°C.

Polymer D: High pressure produced ethylene-vinyl-  
 35 trimethoxysilane copolymer having a density of 922 kg/m<sup>3</sup>, MFR<sub>2.16</sub>=0.9 g/10 min and a VTMS content of 1.9 weight%. Produced in a tubular reactor at 2300 bar and 310°C.



Polymer M-2: High density grafted silane PEX polymer having a density of  $950 \text{ kg/m}^3$  and  $\text{MFR}_{5.0}=1 \text{ g/10 min.}$

5 PVC-Jacket: typical PVC jacket formulation consisting of 20% plastisizer, e. g. dioctylphthalate, DOP, 20 weight% chalk and lead stabilizer.

Catalyst master batch CMB-1: In all examples 5% of CMB-1 was dry blended into the polymers prior to extrusion. CMB-1 consists of 1.7% dodecylbenzenesulphonic acid crosslinking catalyst, drying agent and antioxidants mixed into an ethylene butylacrylate copolymer. Butylacrylate content: 17 weight%, MFR<sub>2</sub>=4.5 g/10 min.

Catalyst master batch CMB-2 consists of a standard tin silanol condensation catalyst dibutyl-tin-dilaurate (1%) and antioxidants mixed into a high density polyethylene. In all pipe examples 5% of CMB-2 was dry blended into the polymers prior to extrusion. The blend was extruded to 32x3 mm natural pipes which were kept in a water bath at 95°C for at least 16 hours. Each pipe was pressure tested according to DIN 16894/16892.

The tested cables were manufactured in the following way: Cables consisting of an 8 mm<sup>2</sup> compact aluminium conductor and an insulation thickness of 0.7 mm were produced in a Nokia-Maillefer 60 mm extruder at a line speed of 75 m/min.

Die: Pressure (wire guide 3.1 mm, die 4.4 mm).

Conductor temperature: 20°C (non-pre-heated conductor) or 110°C (pre-heated conductor).

30 Cooling bath temperature: 23°C.

Screws: Elise.

Temperature profile:170-180-190-190-190-190-190-190°C.

5% of the crosslinking catalyst master batch CMB-1  
35 was dry blended into the polymers prior to extrusion.

In order to measure the influence of plastisizer migration the cable core produced according to the descrip-

5

Composition	VTMS weight%	MFR <sub>2</sub> g/10 min	Density kg/m <sup>3</sup>	Temp °C	Stress MPa	Failure time h
Quality control point, DIN 16874				95	2.8	>1000
Polymer D, LDPE VTMS copolymer	1.9	0.9	922	95	2.8	0.7
Blend of polymer D with 30 weight% Polymer M-1	1.4	1.2	934	95	2.8	0.7
Polymer A, MDPE VTMS co-polymer	1.9	1.9	930	95	2.8	>7700 no failure

From table 1 it is clearly shown that by increasing the density of the copolymer resin (polymer D) by blending with a high density polyethylene polymer (30 weight% polymer M-1) will not result in passing the quality control point of pressure resistance at 95°C, see table 1. By increasing the density of the ethylene-vinyltrimethoxysilane copolymer base resin to 930 kg/m<sup>3</sup> (polymer A) the extruded and afterwards crosslinked pipes pass the quality control point of pressure resistance at 95°C as stated in the German medium density norm for MD-PEX pipes, DIN 16894.

### Example 2

20 By blending high density polyethylene into the ethylene-vinyltrimethoxysilane copolymer (polymer A) the hydrostatic pressure resistance will be increased. In table 2 below, the hydrostatic pressure behaviour of the medium density ethylene-vinyltrimethoxysilane copolymer  
25 (polymer A) and a blend of this silane copolymer with 15 weight% and 30 weight% high density polyethylene (polymer

Composition	Density kg/m <sup>3</sup>	Gel content % ASTM D 2765	Stress MPa	Failure time hours
Polymer A, 930 kg/m <sup>3</sup>	930	85	3.2 3.0 2.8	1.3 89 and 17.2 >7700 no failure
+ 15 weight% HDPE	934	75	3.6 3.4 3.2	3.3 4.9 >6500 no failure
+ 30 weight% HDPE	937	68	3.8 3.6	12 and 3.7 545 and 628

40 weight% of silane crosslinkable medium density polyethylene (MEPE) product polymer A having a density of 930 kg/m<sup>3</sup> was blended with 30 weight% of grafted silane crosslinked PEX high density polyethylene product polymer M-2 with a density of 950 kg/m<sup>3</sup> and 30 weight% of high density polyethylene product polymer M-1 having a density of 954 kg/m<sup>3</sup>. The pressure resistance in accordance with the quality control point of pressure resistance at 95°C as stated in the German high density norm for HD-PEX pipes., DIN 16892. The gel content should preferably be >65%, measured according to ASTM D 2765.

Composition	Density kg/m <sup>3</sup>	Gel content % ASTM D 2765	Temp °C	Stress MPa	Failure time hours
Quality control point DIN 16892		>65	95	4.4	>1000
Polymer A	930	85	95	4.4	0.1
Polymer A	943	68.5	95	4.4	>1400
/M-1/M-2 (40/30/30 weight%)			95	4.6	290

## Example 4

In order to investigate the need of preheating the conductor cables were produced with and without preheating of the conductors as described above. Some cable  
 5 cores were coated with a 2 mm PVC jacket and aged in a heating oven at 100°C for 168 hours. The results are presented in table 4.

Table 4

Material	Specified demands (e. g. VDE 0273-603)	Polymer A +5% CMB-1	Polymer B +5% CMB-1	Polymer C +5% CMB-1
Density (kg/m <sup>3</sup> ) ASTM D 2839		930	925	922
Insulation extruded on non-preheated conductor				
Tensile strength at break (MPa) ISO 527	>12.5	15.0	13.1	12.5
Elongation at break (%) ISO 527	>200	245	204	180
Insulation extruded on preheated conductor				
Tensile strength at break (MPa) ISO 527	>12.5	24.7	21.9	19.7
Elongation at break (%) ISO 527	>200	440	368	361
Ageing of cable in contact with PVC jacket, 168h, 100°C				
Change of tensile strength at break (%)	<25	18	23	>30
Change of elongation at break (%)	<25	15	22	>30
Weight increase (%)	No requirement	12	15	19

10

The results presented in table 5 show that polymers A and B fulfil the specified requirements (e. g. VDE 0273-603) without any need of preheating or use of

protection layers between the PVC jacket and the insulation.

## CLAIMS

1. A crosslinkable high pressure polyethylene composition containing ethylene silane copolymer resin having  
5 a content of silane of about 0.1 to 10 weight% and at least one silanol condensation catalyst, characterized in that the density of the composition is  $>925 \text{ kg/m}^3$ .

2. A crosslinkable high pressure polyethylene composition according to claim 1, wherein the density of the  
10 composition is  $>928 \text{ kg/m}^3$ , preferably  $>933 \text{ kg/m}^3$ .

3. A crosslinkable high pressure polyethylene composition according to claim 2, wherein the ethylene silane copolymer resin is an ethylene-vinyltriethoxysilane copolymer, an ethylene-gamma-methacryloxytriethoxysilane  
15 copolymer, an ethylene- vinyltrimethoxysilane copolymer or an ethylene-gamma-trimethoxysilane copolymer resin, preferably an ethylene- vinyltrimethoxysilane copolymer resin.

4. A crosslinkable high pressure polyethylene composition according to claim 3, wherein the ethylene- vinyl-  
20 trimethoxysilane copolymer resin further comprises high density polyethylene in an amount of  $<40 \text{ weight\%}$ .

5. A crosslinkable high pressure polyethylene composition according to claim 4, wherein the amount of high  
25 density polyethylene is 15-35 weight%, preferably 20-30 weight%.

6. A crosslinkable high pressure polyethylene composition according to any of claims 1-5, wherein the  $\text{MFR}_2$  at  
30  $190^\circ\text{C}/2.16 \text{ kg}$  is 0.1-100 g/10 min, more preferably 0.5-6 g/10 min and most preferably 1-4 g/10 min.

7. A crosslinkable high pressure polyethylene composition according to any of claims 1-6, wherein the elongation at break is  $>200\%$  as measured according to ISO  
35 527.

8. A crosslinkable high pressure polyethylene composition according to any of claims 1-7, wherein the ten-

tile strength at break is >12.5 MPa as measured according to ISO 527.

9. A crosslinkable high pressure polyethylene composition according to any of claims 1-8, wherein the gel content is >65 weight% as measured according to ASTM D 2765.

10. A crosslinkable high pressure polyethylene composition according to any of claims 1-9, wherein the polyethylene composition further comprises 0.1-2.0 weight% of a drying agent.

11. A process for the preparation a crosslinkable polymer composition according to any of claims 1-10 characterised in that the process is a high pressure process at a pressure above 1200 bar.

15            12. A process according to claim 11, wherein the polymer composition is crosslinked in the presence of a silanol condensation catalyst comprising a compound of formula (I):

20                       $\text{ArSO}_3\text{H}$  (I)

or a precursor thereof, Ar being a hydrocarbyl substituted aromatic group comprising at least 14 carbon atoms.

25            13. A process according to claim 11, wherein the polymer composition is crosslinked in the presence of a silanol condensation catalyst, preferably dibutyl-tin-dilaurate.

14. A pipe made of a crosslinkable polymer composition according to any of claims 1-10.

15. A pipe according to claim 14, wherein the pressure resistance at 95°C is at least 2.8 MPa, more preferably 3.6 MPa and most preferably 4.4 MPa for a failure time of at least more than 1000 hours.

35 16. Use of a crosslinkable polymer composition according any of claims 1-10 as an insulation for a cable.

## ABSTRACT

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED DATE 01-12-2001 BY 60322 UCBAW



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**